



GMI BÆRBAR GAS DETEKTOR

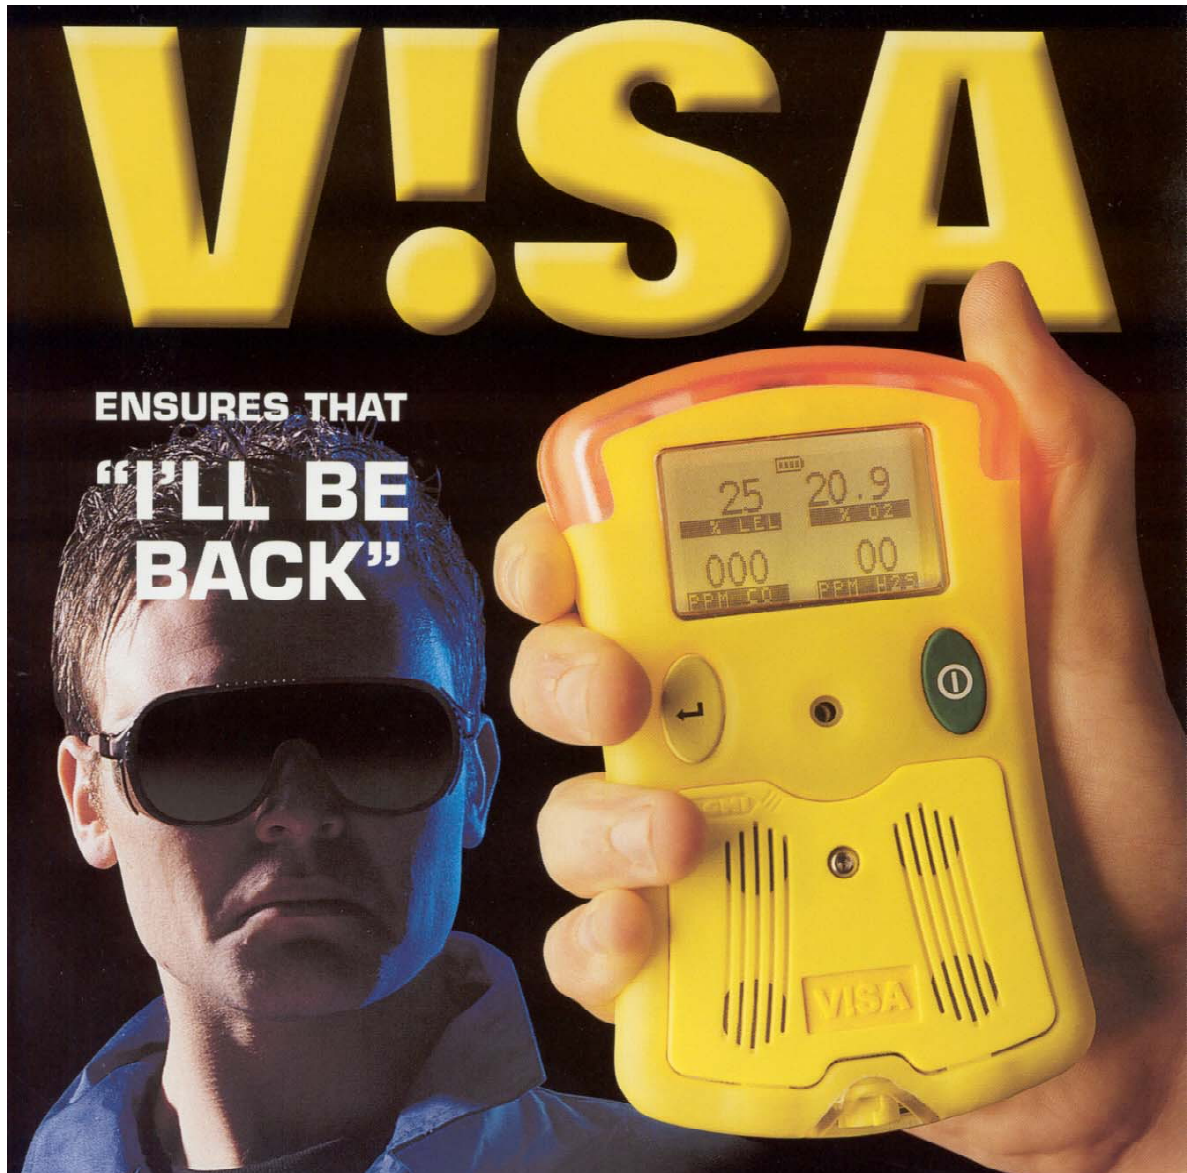


Din robuste, lette og flexible adgang til sikker ind- og udgang fra indelukkede rum.

- Unik visual alarm - 360° tydelig alarm.
- Ekstrem høj hørlig alarm, 95dBA.
- Forkalibrede sensor teknologi med et udstrakt område af gas sensorer.
- Specielt designet til sikkerhed før man går ind og under ophold.
- Et unique produkt med indbygget pumpe.
- Fremstillet i slagfast og synligt materiale.
- I overensstemmelse med international certifikation.

Designet til os - af vore kunder

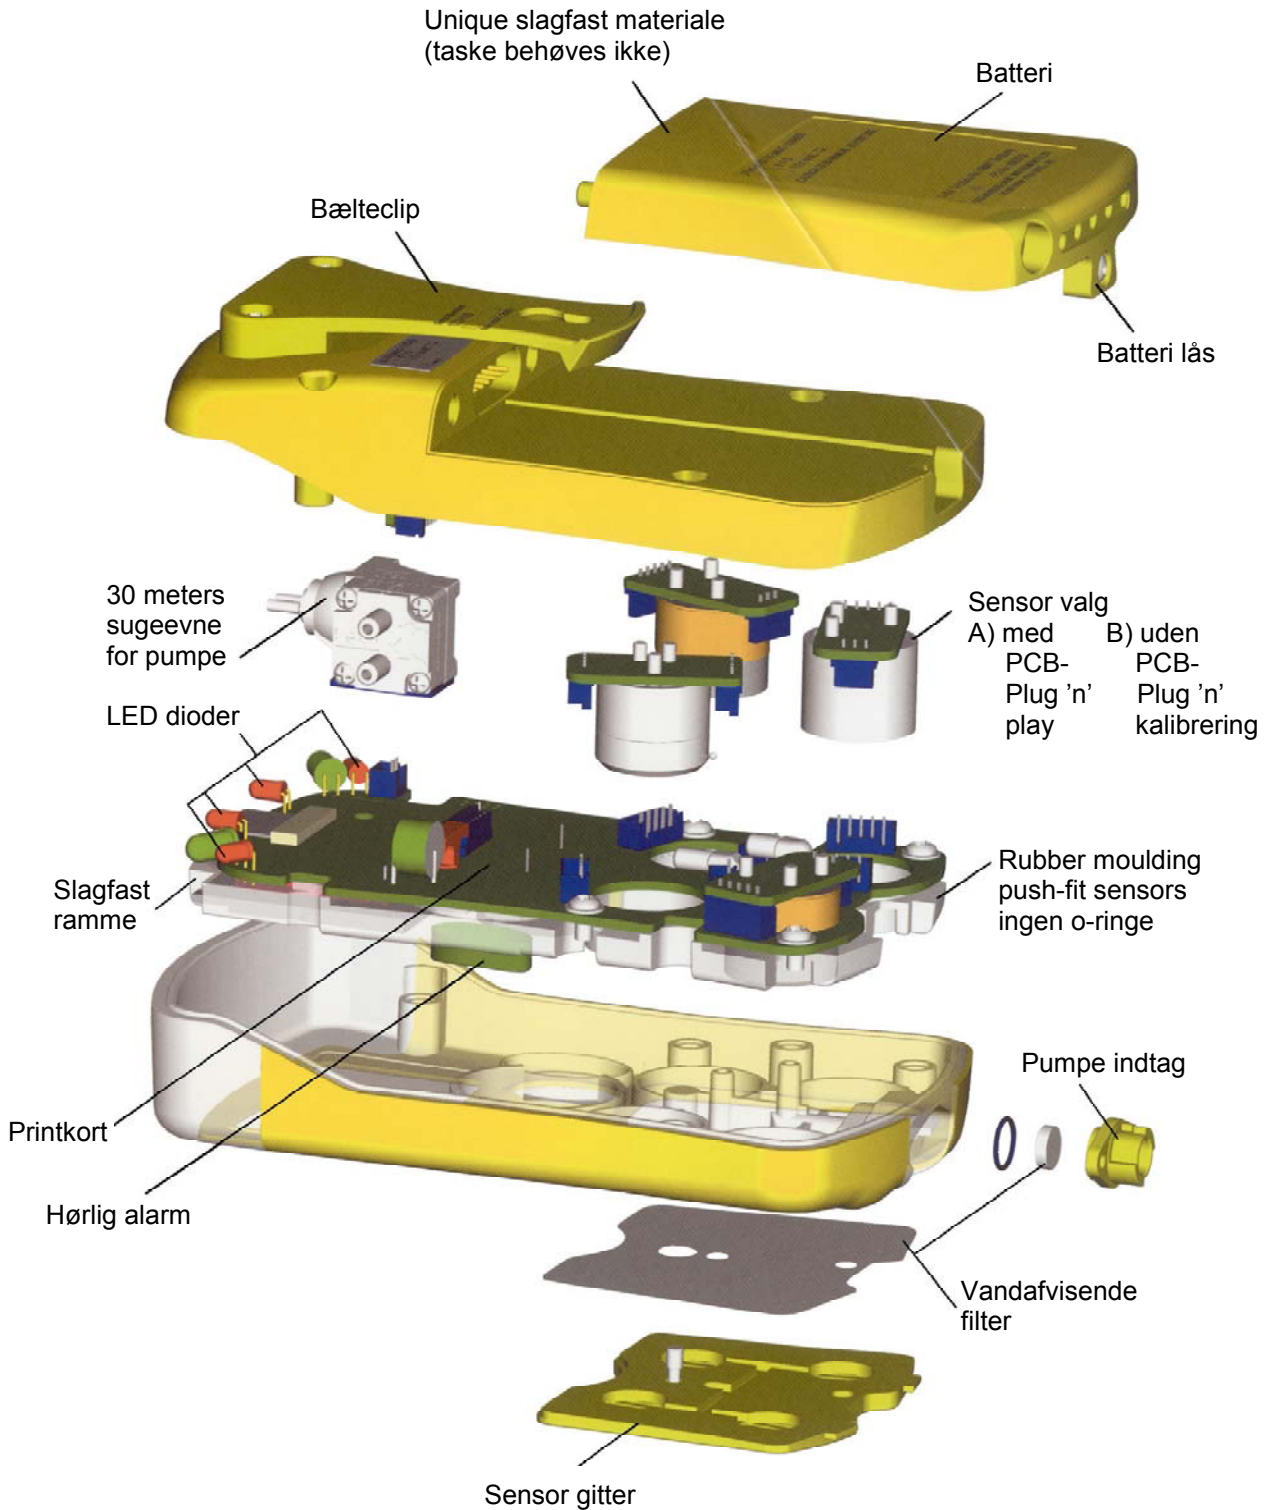

Designet til os - af vore kunder

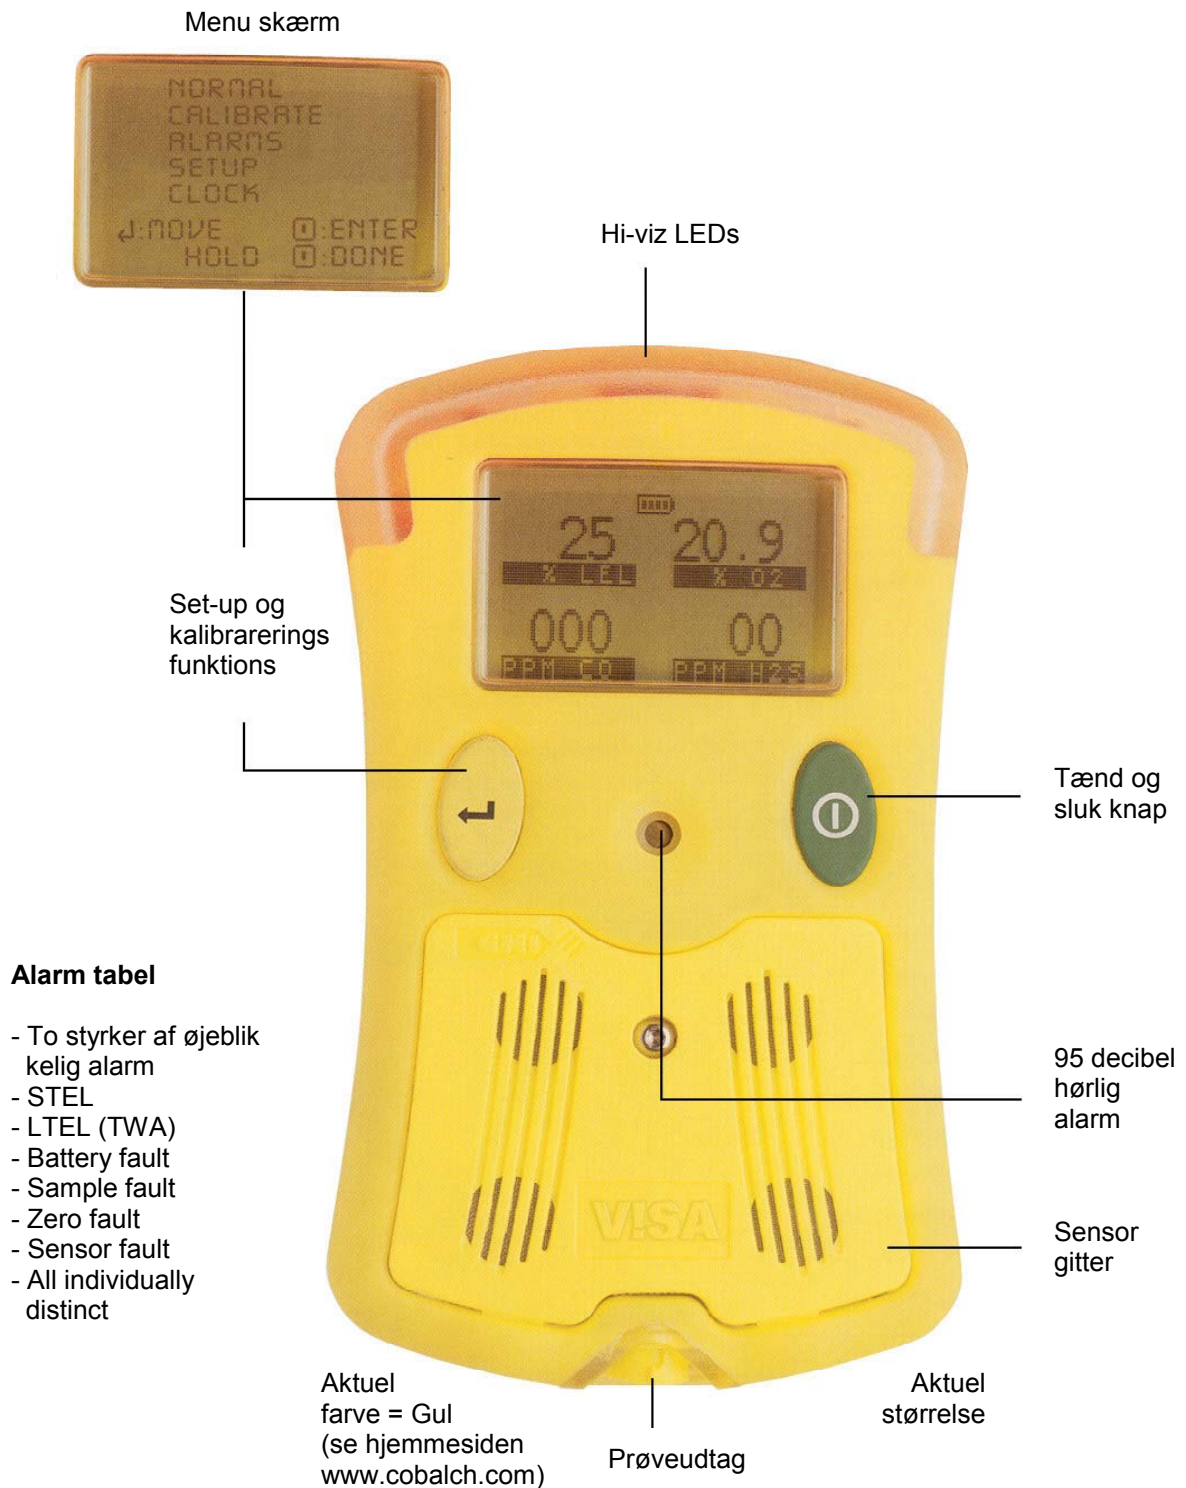

Ordering requirement

Parent Instrument

6	6								
---	---	--	--	--	--	--	--	--	--

Battery type

Code no.

Alkaline (dry cell)	1
Standard NiMH	2
Long duration NiMH	3

6	6								
---	---	--	--	--	--	--	--	--	--

Notes:

- Alkaline (Dry cell) provides up to 24 hours operation without pump, or 17 hours with pump.
- Standard rechargeable battery provides up to 14 hours operation without pump, or 10 hours with pump.
- Long duration rechargeable battery provides up to 20 hours operation without pump, or 14 hours with pump.

Pump

Code no.

Yes	6
No	7

6	6								
---	---	--	--	--	--	--	--	--	--

Datalogging

Code no.

Yes	8
No	9

6	6								
---	---	--	--	--	--	--	--	--	--

Sensors

Range

Code no.

FLAM	0-100% LEL	A
O ₂	0-25%	B
H ₂ S	0-100 PPM	C
CO	0-1000 PPM	D
H ₂ S/CO	as items C & D	E
SO ₂	0-30 PPM	F
CL ₂	0-10 PPM	G

6	6								
---	---	--	--	--	--	--	--	--	--

Note 1: Five gasses are only possible when two of the gasses are H₂S and CO (i.e. sensor E is used).

Note 2: Each instrument is supplied complete with user handbook, battery/sensor grille key, inlet filter, belt clip and calibration certificate. If a rechargeable battery type is selected, a standard charger is also included.

Accessories

Standard accessories

Hand aspirator	66123	<input type="checkbox"/>
Sample line (per metre)	66118	<input type="checkbox"/>
3.0 metres tygon tubing c/w connector	66136	<input type="checkbox"/>
Neck harness with clip	66028	<input type="checkbox"/>
Chest harness with clip	66029	<input type="checkbox"/>
Harness with webbing clip	66205	<input type="checkbox"/>
Probe assembly	66017	<input type="checkbox"/>
Probe and piece	66018	<input type="checkbox"/>
Probe extension	66019	<input type="checkbox"/>
Probe connector	85224	<input type="checkbox"/>
Battery/sensor grille key (2 mm.A/F)	66166	<input type="checkbox"/>
Inlet filter key (1.5 mm.A/F)	66165	<input type="checkbox"/>
CD rom (Instruction manual)	66203	<input type="checkbox"/>
Setup/alarms/field calibration		<input type="checkbox"/>

Standard Charger

Part no.

Charger (UK plug)	66140	<input type="checkbox"/>
Charger (Euro plug)	66141	<input type="checkbox"/>
Charger (USA plug)	66142	<input type="checkbox"/>
Charger (Australian plug)	66143	<input type="checkbox"/>
10 - Way universal plug	66207	<input type="checkbox"/>
12V/24V vehicle charger lead	66206	<input type="checkbox"/>

Communications options Part no.

Serial connector with datalogging, configuration and calibration software	66208	<input type="checkbox"/>
USB adaptor - for above item	66209	<input type="checkbox"/>

Specifications

Physical properties

Weight: 0,4 kg
Dimensions: 140x85x45 mm

Environment


Temperature limits -20° to +50°
Humidity: 0 - 95% R.H.
non-condensing


Performance

Complies with:
EN 61779 (Flamable)
EN 50104 (Oxygen)
EN 45544 (Toxic)

Certification

ATEX  II 1 G EEx ia IIC T3 

 CLASSIFIED UL 913 Class I Group ABCD

 EC type approval certificate MED



Forbehold for tekniske ændringer

08-03-270